




HANDLEIDING MANUEL D'INSTRUCTIONS MOUNTING INSTRUCTIONS

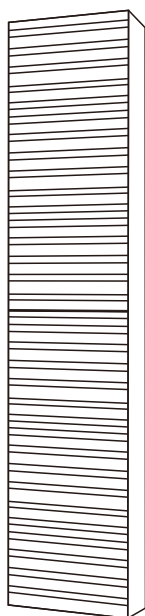


KAMELLIA
KAMBD160.01

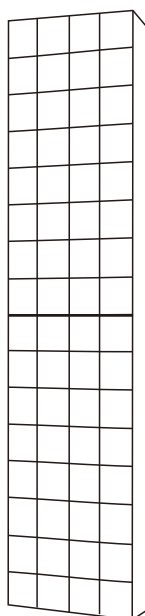


MIMOZA
MIMBD160.01

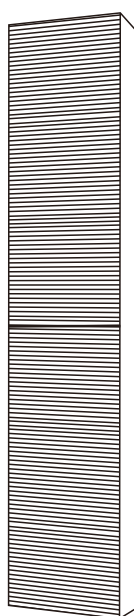

LAYDA
LAYBD160.01



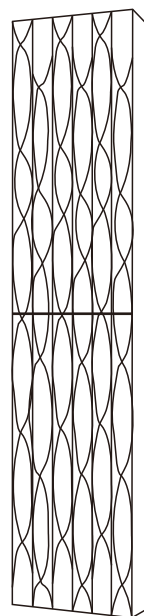


MAGNOLIA
MAGBD160.01


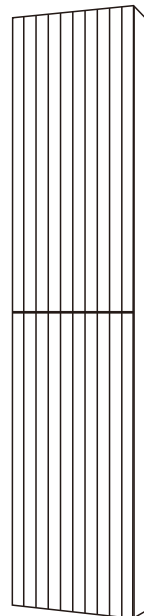


BEGONIA
BEGBD160.01/2

Montagemateriaal | Matériel de montage | Mounting material




Gereedschap (niet inbegrepen)) | Outils (non inclus)) | Tools (not included))




Montageinstructies | Instruction de montage | Mounting instructions


1. Boor 4 gaten van 6mm
Percez 4 trous de 6 mm
Drill 4 holes of 6 mm

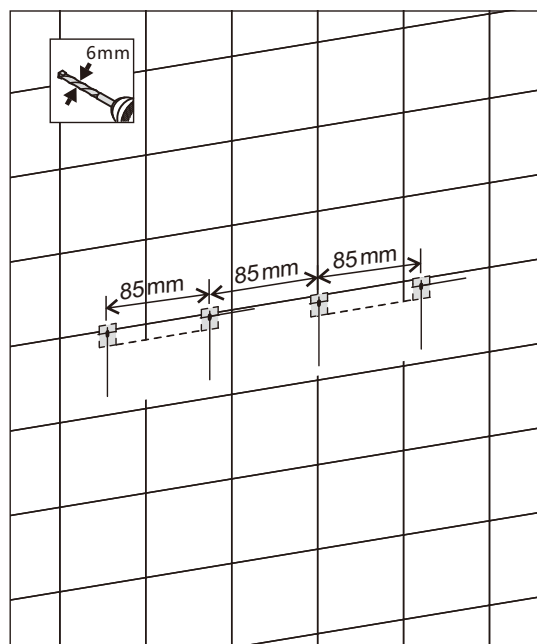

- 2. Zet de beugels vast met de meegeleverd schroeven en pluggen**
Fixez les supports avec les vis et chevilles fournies.
Secure the brackets with the supplied screws and plugs.

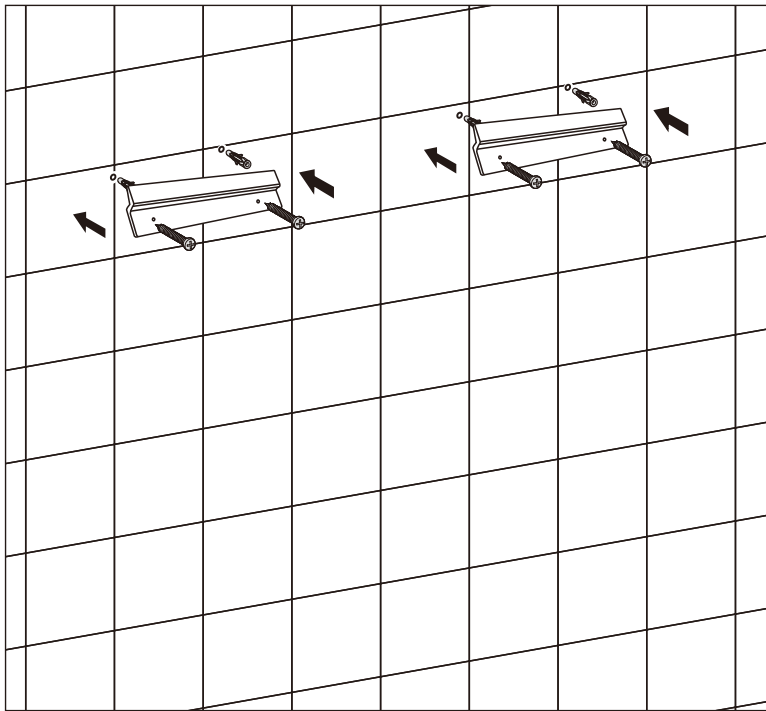

- 3. Hang de kolomkast over de beugels en controleer of deze vast hangt!**
Accrochez le colonne sur les supports et vérifiez qu'elle est bien fixée !
Hang the column cabinet over the brackets and check if it is securely attached!

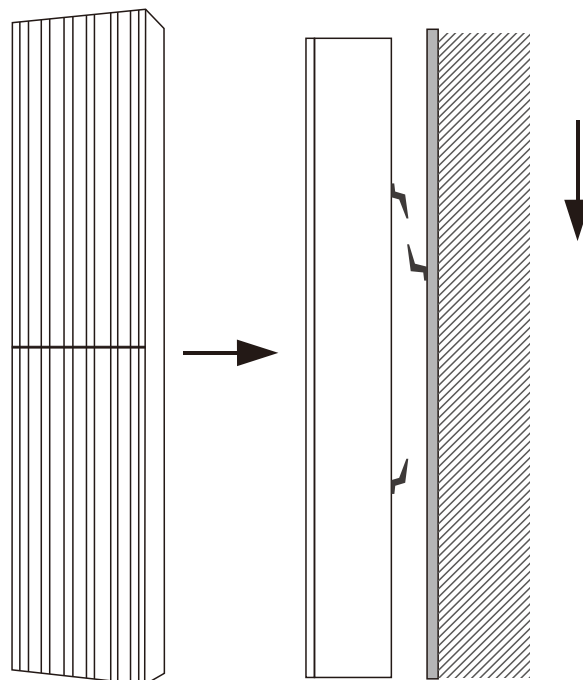


Instructies afstellen scharnieren

Instructions réglage des charnières

Hinges adjustment instructions


PIVOT-PRO side adjustment

Side adjustment of the door is made by using the indicated screw.

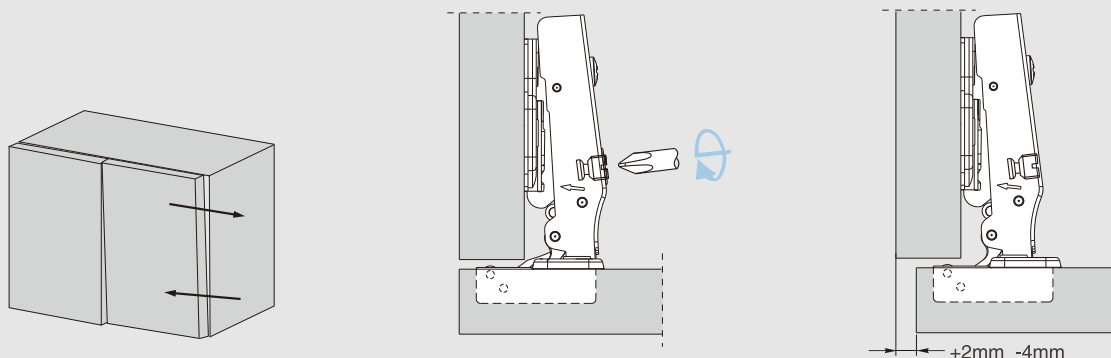

PIVOT-PRO depth adjustment

Depth adjustment is made without loosening any screw. The door can be moved in or out by rotating the cam adjuster on the hinge arm.

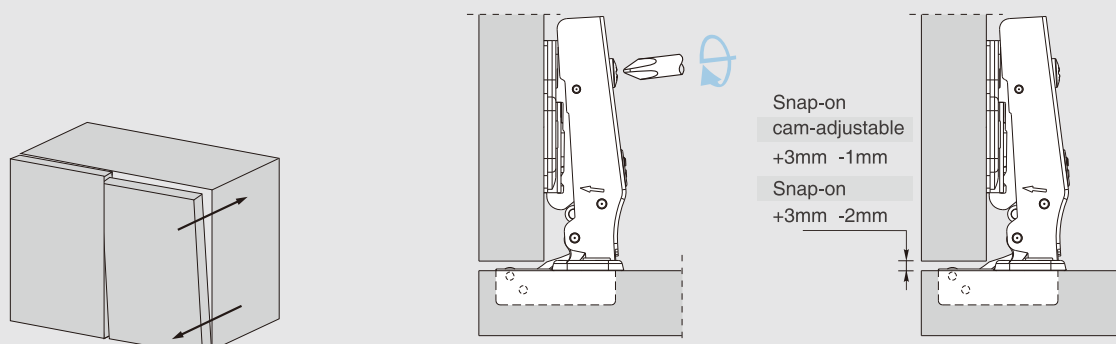

PIVOT-PRO height adjustment

By loosening the two fixing screws to allow the mounting plate to slide up or down, the door can be adjusted vertically by ± 2 mm. After retightening the screws, the depth adjustment is done.

